

# Renderoc® Plug

## Rapid setting cement based, water leak plugging mortar

### Uses

For the rapid temporary patching and plugging of concrete segments, concrete and brick tunnel linings, sewage systems, below ground access chambers, pipes, basements, foundations and mines.

### Advantages

- Emergency water - stopping capability
- Single component - only the addition of clean water is required.
- Excellent bond to the substrate
- Low exotherm minimises thermal cracking
- Pre-packed formulation to overcome variation in site batching
- Contains no chloride admixtures.

### Description

Renderoc Plug is supplied as a ready to use blend of dry powders which requires only the addition of clean water at site to produce a highly consistent, rapid setting mortar which is easy to apply in many difficult conditions. The material is based on a blend of cements, graded aggregates, special fillers and chemical additives which control the rate of set and minimise the risk of thermal cracking.

### Technical support

Fosroc offers a comprehensive range of high performance, high quality concrete repair and construction products. In addition, Fosroc offers technical support service to specifiers, end users and contractors, as well as on-site technical assistance in locations all over the country.

### Design criteria

Renderoc Plug can be applied to horizontal, vertical or overhead surface at a wide range of thickness. Generally, the volume of mixed material used in a single application is restricted to that which can be applied by trowel or gloved hand. Thicker sections can be built up in layers. If any doubt arises about the nature of the substrate, consult the local Fosroc office for further information.


### Properties

Initial set time                      Approx. 1 - 2 mins. at 30°C

**Note :** Set times will be extended when mixed or applied at lower temperatures.

**Compressive strength :** 25N/mm<sup>2</sup> @ 28 days @ 30°C

**Heat generation characteristics :** High heat output (exotherm) leads to undesirably high shrinkage and consequent thermal cracking. The curves below show the low heat output of Renderoc Plug which minimises the risk of shrinkage and thermal cracking.

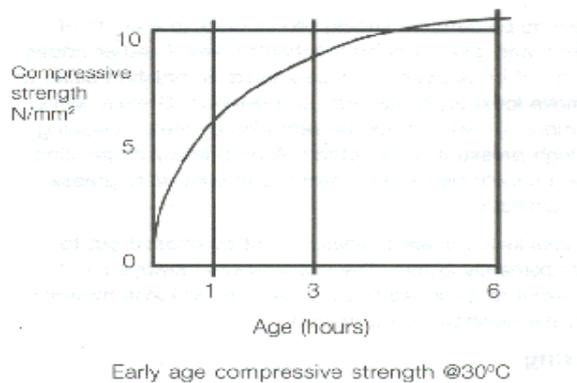

### Specification clauses

#### Water stopping mortar

The water stopping mortar shall be Renderoc Plug, a single component cement based product to which only the site - addition of clean water shall be permitted. It must be chloride free and shall have a low exotherm to minimise thermal cracking.

### Application instructions

#### Preparation

Areas to be patched should be cut back to a depth of 15mm and given a good mechanical key. Feather edges must not be allowed. Surface should be brushed clean to remove loose material, dust and laitence. Grease, slime or mould growth should be removed by steam cleaning or high pressure water jetting. A proprietary degreasing agent should be used for removal of light oil or grease contamination.

To seal leaks, crack openings must be chased out to approximately 20mm. The chase should always be undercut to avoid leaving a V-section. All loose material and debris should be removed.

#### Mixing

Renderoc Plug should be added to clean water in the following proportions :

One part clean water : 3 parts Renderoc Plug ( measured by volume ).

# Renderoc® Plug

Mix to a stiff consistency in a suitable container using a trowel or gloved hand. Due to the rapid set characteristics of the product, only prepare a quantity of mortar which can be placed within the prescribed set time.

## Application

Trowel apply or hand-knead the mixed mortar in place, ensuring maximum contact with the substrate before the material sets. If being used to plug running water, Renderoc Plug should be used and held in place until the initial set is reached.

## Cleaning

Renderoc Plug should be removed from tools, equipment and mixers with clean water prior to the initial set. Cured material can only be removed mechanically.

## Limitations

Renderoc Plug should not be used when the temperature is below 10°C and falling.

## Storage

## Shelf life

Renderoc plug has a shelf life of 6 months if kept in a dry store in the original, unopened bags.

## Precautions

## Health & Safety

Renderoc Plug contains cement powders which, when mixed or become damp, release alkalis which can be harmful to the skin. During use, avoid inhalation of dust and contact with skin and eyes. Wear suitable protective clothing, gloves, eye protection and respiratory protective equipment. The use of barrier creams provide additional skin protection. In case of contact with skin, rinse with plenty of clean water, then cleanse with soap and water. In case of contact with eyes, rinse immediately with plenty of clean water and seek medical advice. If swallowed, seek medical attention immediately - do not induce vomiting.

## Fire

Renderoc Plug is non-flammable.

® Denotes the trademark of Fosroc International Limited

### Important note :

Fosroc products are guaranteed against defective materials and manufacture and are sold subject to its standard terms and conditions of sale, copies of which may be obtained on request. Whilst Fosroc endeavours to ensure that any advice, recommendation specification or information it may give is accurate and correct, it cannot, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products whether or not in accordance with any advice, specification, recommendation or information given by it.



## Fosroc Chemicals (India) Pvt. Ltd.

### Head Office

'Vishnu Chittam', No. 10, 2nd Floor  
Sirur Park B Street, Seshadripuram  
Bangalore 560020

[www.fosroc.com](http://www.fosroc.com)

### telephone

++91 80-2334 3188

### fax

++91 80-2334 3178

### e-mail

india@fosroc.com

### Regional Offices

#### Bangalore

'Vishnu Chittam', No.10, 1stFloor  
Sirur Park B Street, Seshadripuram  
Bangalore 560 020  
Ph:080-2334 3188  
Fax : 080-23368667  
email: Bangalore@fosroc.com

#### Mumbai

208/209, Persepolis  
Sector 17, Vashi  
Navi Mumbai 400 703  
Ph:022-2789 6411/12  
Fax: 022 - 2789 6413  
email:Mumbai@fosroc.com

#### Delhi

109-113, 1st Floor, Vikrant Towers  
4, Rajendra Place  
New Delhi 110 008  
Ph:011- 45062000-5  
Fax: 011- 45062001  
email:Delhi@fosroc.com

#### Kolkata

P-569, Lake Terrace Extn.  
First Floor  
Kolkata 700 029  
Ph: 033 24650917 / 55343188  
Fax: 033-24650891  
email:Kolkata@fosroc.com

- Ahmedabad : (079) 26762799 ● Ankleshwar : (02646) 220704/224687 ● Bellary: 09845891690 ● Bhubaneshwar : (0674) 2521176
- Chennai : (044) 24899949/24853383 ● Chandigarh : (0172) 2639360 ● Cochin : (0484) 2347465 ● Coimbatore : (0422) 2472966
- Goa : (0832) 09423058696 ● Guwahati : (0361) 2462866 ● Hyderabad : (040) 27662324/27662425 ● Indore : (0731) 4049339
- Jaipur : (0141) 2336103 ● Lucknow : (0522) 2239044 ● Nagpur: (0712) 2753510/2563242 ● Visakhapatnam : (0891) 2564850 / 2707607

